



APLUS
High Performance Tyres

**PASS
UNIMPEDEDLY**

PERFORMANCE



TAXI max



A609



**ALL TERRAIN
A929**



A867



A869



A608



A868



**SHREDDER RT
ROCK SHREDDER-R/T**



A866



A701



A506



A607



A909



A919



**MUD TERRAIN
A929**



GAZILL



A702



A503



A610



AS909



A607



**MUD TERRAIN
A939**



ASV909



A703



A502

PCR

ALL SEASON

SUV

4X4

COMMERCIAL

WINTER

THE ROAD

A608 M+S



UTQG: 420 AA—480 AA

Perfect handling performance and good cornering performance.

Asymmetric pattern shape, optimized variable pitch pattern design, provide quiet ride environment.

Nice driving pleasure comes from strong tread and soft sidewall.

Silica tread compound for low rolling resistance and good wet grip.

Performance Test



STABILITY




ECONOMY



SILENCE



WET

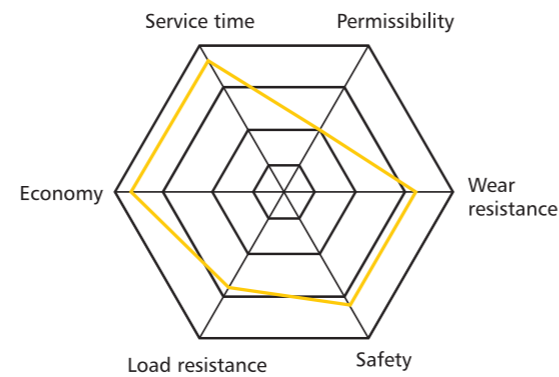

Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load LBS	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
155/65R13	-	73	T	7.1	157	4.50B	532	420 AA	365	805	300	44	BSW
165/65R13	-	77	T	7.1	170	5.00B	544	420 AA	412	908	300	44	BSW
165/70R13	-	79	T	6.9	170	5.00B	562	420 AA	437	963	300	44	BSW
165/80R13	-	83	T	7.6	165	4.50B	594	420 AB	487	1074	300	44	BSW
175/70R13	-	82	T	7.1	177	5.00B	576	420 AA	475	1047	300	44	BSW
185/70R13	-	86	T	7.3	189	5.50B	590	420 AA	530	1168	300	44	BSW
175/65R14	-	79	T	6.9	170	5.00B	562	420 AA	437	963	300	44	BSW
175/70R14	-	84	H	7.1	177	5J	602	480 AA	500	1102	300	44	BSW
185/60R14	-	82	H	7.3	189	5 1/2J	578	480 AA	475	1047	300	44	BSW
185/65R14	-	86	H	7.3	189	5 1/2J	596	480 AA	530	1168	300	44	BSW
185/70R14	-	88	H	7.3	189	5 1/2J	616	480 AA	560	1235	300	44	BSW
195/60R14	-	86	H	7.3	201	6J	590	480 AA	530	1168	300	44	BSW
195/70R14	-	91	H	7.3	201	6J	630	480 AA	615	1356	300	44	BSW
175/65R15	-	84	H	7.3	177	5J	609	480 AA	500	1102	300	44	BSW
185/55R15	-	82	V	7.6	194	6J	585	480 AA	475	1047	300	44	BSW
185/60R15	-	84	H	7.3	189	5 1/2J	603	480 AA	500	1102	300	44	BSW
185/65R15	-	88	H	7.3	189	5 1/2J	621	480 AA	560	1235	300	44	BSW
195/55R15	-	85	H	7.2	201	6 J	595	480 AA	515	1135	300	44	BSW
195/55R15	-	85	V	7.2	201	6J	595	480 AA	515	1135	300	44	BSW
195/60R15	-	88	H	7.6	201	6J	615	480 AA	560	1235	300	44	BSW
195/60R15	-	88	V	7.6	201	6J	615	480 AA	560	1235	300	44	BSW
195/65R15	-	91	H	7.3	201	6J	635	480 AA	615	1356	300	44	BSW
195/65R15	-	91	V	7.3	201	6J	635	480 AA	615	1356	300	44	BSW
205/60R15	-	91	V	7.8	209	6J	627	480 AA	615	1356	300	44	BSW
205/65R15	-	94	H	7.6	209	6J	647	480 AA	670	1477	300	44	BSW
205/70R15	-	96	H	7.8	209	6J	669	480 AA	710	1565	300	44	BSW
215/60R15	-	94	H	7.8	221	6 1/2J	639	480 AA	670	1477	300	44	BSW
215/65R15	-	96	H	8	221	6 1/2J	661	480 AA	710	1565	300	44	BSW
215/70R15	-	98	H	7.8	221	6 1/2J	683	480 AA	750	1653	300	44	BSW
205/55R16	-	91	H	7.2	214	6 1/2J	632	480 AA	615	1356	300	44	BSW
205/55R16	-	91	V	7.2	214	6 1/2J	632	480 AA	615	1356	300	44	BSW
205/60R16	-	92	V	7.8	209	6J	652	480 AA	630	1389	300	44	BSW
205/65R16	-	95	H	7.6	209	6J	672	500 AA	690	1521	300	44	BSW
215/55R16	-	93	H	7.4	226	7J	642	480 AA	650	1433	300	44	BSW
215/60R16	-	95	H	7.9	221	6 1/2J	664	480 AA	690	1521	300	44	BSW
215/65R16	-	98	H	8	221	6 1/2J	686	480 AA	750	1653	300	44	BSW
225/60R16	-	98	H	7.9	228	6 1/2J	676	480 AA	750	1653	300	44	BSW
235/60R16	-	100	H	8	240	7J	688	480 AA	800	1764	300	44	BSW

The labeling information is subject to change without notice.

A607 M+S



UTQG: 300 AA

Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance.

Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage.

Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.

Special tread compound delivers excellent grip on both dry and wet roads and reduce the rolling resistance to save oil and protect environment.

Performance Test



COMFORT




HIGH PERFORMANCE



SILENCE



DRAINAGE

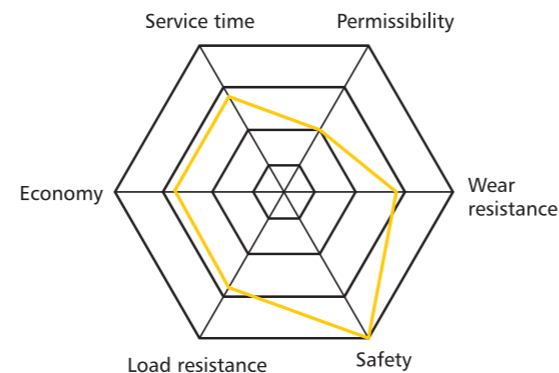

Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load		MAX Pressure		Sidewall Description
									Kg	LBS	Kpa	Psi	
195/50R15	-	82	V	7.8	201	6J	577	300 AA	475	1047	300	44	BSW
195/55R15	-	85	V	7.8	201	6J	595	300 AA	515	1135	300	44	BSW
185/55R16 XL	-	87	V	7.0	194	6 J	610	300 AA	545	1201	340	50	BSW
195/45R16 XL	-	84	V	7.0	195	6 1/2J	582	300 AA	500	1102	340	50	BSW
195/50R16 XL	-	88	V	7.0	201	6J	602	300 AA	560	1235	340	50	BSW
195/55R16 XL	-	91	V	7.8	201	6J	620	300 AA	615	1356	340	50	BSW
205/45ZR16 XL	-	87	W	7.0	206	7J	590	300 AA	545	1201	340	50	BSW
205/50ZR16 XL	-	91	W	7.8	214	6 1/2J	612	300 AA	615	1356	340	50	BSW
205/55ZR16 XL	-	94	W	7.8	214	6 1/2J	632	300 AA	670	1477	340	50	BSW
215/55ZR16 XL	-	97	W	7.8	226	7J	642	300 AA	730	1609	340	50	BSW
225/50ZR16 XL	-	96	W	7.0	233	7J	632	300 AA	710	1565	340	50	BSW
225/55ZR16 XL	-	99	W	7.8	223	7J	654	300 AA	775	1709	340	50	BSW
225/50ZR17 XL	-	98	W	7.8	233	7J	658	300 AA	750	1653	340	50	BSW
235/50ZR17 XL	-	100	W	7.0	245	7 1/2J	668	300 AA	800	1764	340	50	BSW
245/40ZR17 XL	-	95	W	7.0	248	8 1/2J	628	300 AA	690	1521	340	50	BSW
245/45ZR17 XL	-	99	W	7.0	243	8J	652	300 AA	775	1709	340	50	BSW
255/35ZR18 XL	-	94	W	7.0	260	9J	635	300 AA	670	1477	340	50	BSW
255/40ZR18 XL	-	99	W	7.0	260	9J	661	300 AA	775	1709	340	50	BSW
255/45ZR18 XL	-	103	W	7.0	255	8 1/2J	687	300 AA	875	1929	340	50	BSW
225/35ZR20 XL	-	90	W	7.8	230	8J	666	300 AA	600	1323	340	50	BSW
225/35ZR20 XL	-	93	W	7.8	230	8J	666	300 AA	650	1433	340	50	BSW
245/30ZR20 XL	-	90	W	7.0	248	8 1/2J	656	300 AA	600	1323	340	50	BSW
245/30ZR20 XL	-	97	W	7.0	248	8 1/2J	656	300 AA	730	1609	340	50	BSW
245/35ZR20 XL	-	95	W	7.0	248	8 1/2J	680	300 AA	690	1521	340	50	BSW
245/45ZR20 XL	-	103	W	7.0	243	8J	728	300 AA	875	1929	340	50	BSW
255/35ZR20 XL	-	97	W	7.0	260	9J	686	300 AA	730	1609	340	50	BSW
255/35ZR20 XL	-	102	W	7.0	260	9J	686	300 AA	850	1874	340	50	BSW
255/45ZR20 XL	-	105	W	7.0	255	8 1/2J	738	300 AA	925	2039	340	50	BSW
275/40R20 XL	-	106	V	7.8	278	9 1/2J	728	300 AA	950	2094	340	50	BSW
275/45R20 XL	-	110	V	7.8	273	9J	756	300 AA	1060	2337	340	50	BSW
305/35R20 XL	-	107	V	7.8	313	11J	722	300 AA	975	2149	340	50	BSW
295/35ZR21 XL	-	107	W	7.8	301	10 1/2J	739	300 AA	975	2149	340	50	BSW
295/40ZR21 XL	-	111	W	7.8	301	10 1/2J	769	300 AA	1090	2403	340	50	BSW
245/30ZR22 XL	-	92	W	7.0	248	8 1/2J	707	300 AA	630	1389	340	50	BSW
255/30ZR22 XL	-	95	W	7.0	260	9 J	713	300 AA	690	1521	340	50	BSW
265/35R22 XL	-	102	V	7.8	271	9 1/2J	745	300 AA	850	1874	340	50	BSW
285/35R22 XL	-	106	V	7.8	290	10J	759	300 AA	950	2094	340	50	BSW
305/40R22 XL	-	114	V	7.8	313	11J	803	300 AA	1180	2601	340	50	BSW
305/45R22 XL	-	118	V	7.8	303	10J	833	300 AA	1320	2910	340	50	BSW
255/30ZR24 XL	-	97	W	7.0	260	9 J	764	300 AA	730	1609	340	50	BSW
275/25ZR24 XL	-	96	W	7.8	283	10J	748	300 AA	710	1565	340	50	BSW
295/35R24 XL	-	110	V	7.8	301	10 1/2J	816	300 AA	1060	2337	340	50	BSW
305/35R24 XL	-	112	V	7.8	313	11J	824	300 AA	1120	2469	340	50	BSW

The labeling information is subject to change without notice.

TAXI max M+S



Three main zigzag grooves combined with lateral blocks provide excellent ride stability and great traction on all of road condition.

Continuous tread patterns on shoulder and solid shoulder ribs provide responsive handling and even wear.

Variable pitch patterns and multi-knife-cut tread pattern reduce vibration to offer the comfort and quiet ride.

Reinforced structure and special abrasion-resistant tread compound deliver extra puncture resistance and load bearing capability with more mileage.

Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load LBS	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
165/70R13LT	6PR	88/86	S	8.2	170	5.00B	562	-	560/530	1235/1168	375	-	BSW
165/70R13	-	79	T	8.2	170	5J	562	420AA	437	963	300	44	BSW
175/70R14	-	84	H	8.2	177	5J	602	560AA	500	1102	300	44	BSW
185/60R14	-	82	T	8.4	189	5 1/2J	578	560AA	475	1047	300	44	BSW
185/65R15	-	88	H	8.4	189	5 1/2J	621	560AA	560	1235	300	44	BSW
195/60R14	-	86	T	8.4	201	6J	590	560AA	530	1168	300	44	BSW
195/55R15	-	85	V	8.3	201	6J	595	560AA	515	1135	300	44	BSW
195/60R15	-	88	V	8.4	201	6J	615	560AA	560	1235	300	44	BSW
205/55R16	-	91	V	8.4	214	6 1/2J	632	560AA	615	1356	300	44	BSW
195/65R15	-	91	V	8.3	201	6J	635	560AA	615	1356	300	44	BSW

The labeling information is subject to change without notice.

Performance Test



STABILITY




OIL



SILENCE



WET

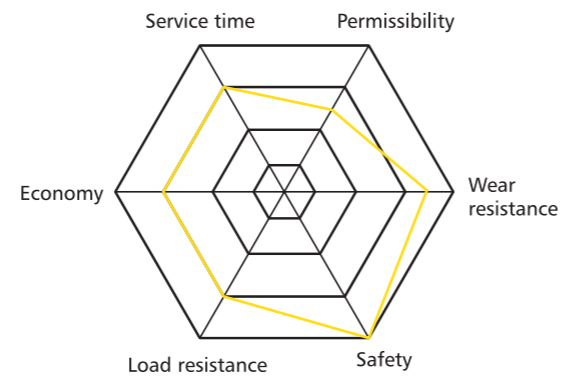

AS909 M+S



Rigid pattern block provides superior handling performance

The pattern block is coherent, and the width is uniform, which ensures the rigidity of the tread to the maximum extent, brings super handling performance, and meets the driving needs of high-end cars.

Reduce noise


The narrow pitch design is adopted, and the pitch arrangement is analyzed and optimized by AI to reduce the noise resonance phenomenon of pattern blocks, making the driving process more quiet and comfortable.




Three-stage main channel design

The inclination angle is constantly changing, the drainage performance is better, and the wet skid resistance is improved, providing safety guarantee for driving in rainy and snowy weather.

Precise control of driving

High-density 3D steel sheet design increases the strength of the pattern and can easily cope with rain and snow environment, providing you with extraordinary grip on the road.



 C
  C
  B

Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	LBS	MAX Pressure Kpa	Psi	Sidewall Description
195/55R16	-	87	V	7.2	201	6J	620	320 AA	545	1201	300	44	BSW
205/55ZR16	-	94	W	7.2	214	6 1/2J	632	320 AA	670	1477	340	50	BSW
215/55ZR16	-	97	W	7.5	226	7J	642	320 AA	730	1609	340	50	BSW
205/40ZR17	-	84	W	7.2	212	7 1/2J	596	320 AA	500	1102	340	50	BSW
215/40ZR17	-	87	W	7.2	218	7 1/2J	604	320 AA	545	1201	340	50	BSW
225/45ZR17	-	94	W	7.2	225	7 1/2J	634	320 AA	670	1477	340	50	BSW
245/45ZR17	-	99	W	7.2	243	8J	652	320 AA	775	1709	340	50	BSW
205/50ZR17	-	93	W	7.2	214	6 1/2J	638	320 AA	650	1433	340	50	BSW
215/50ZR17	-	95	W	7.5	226	7J	648	320 AA	690	1521	340	50	BSW
225/50ZR17	-	98	W	7.5	233	7J	658	320 AA	750	1653	340	50	BSW
205/55ZR17	-	95	W	7.2	214	6 1/2J	658	320 AA	690	1521	340	50	BSW
215/55ZR17	-	98	W	7.5	226	7J	668	320 AA	750	1653	340	50	BSW
225/55ZR17	-	101	W	7.5	233	7J	680	320 AA	925	1819	340	50	BSW
235/55ZR17	-	103	W	7.5	245	7 1/2J	690	320 AA	875	1929	340	50	BSW
235/65R17	-	108	V	7.5	240	7J	738	320 AA	1000	2205	340	50	BSW
225/40ZR18	-	92	W	7.2	230	8J	637	320 AA	630	1389	340	50	BSW
225/45ZR18	-	95	W	7.2	225	7 1/2J	659	320 AA	690	1521	340	50	BSW
215/50ZR18	-	92	W	7.5	226	7J	673	320 AA	630	1389	300	44	BSW
215/55R18	-	99	V	7.5	226	7J	693	320 AA	775	1709	340	50	BSW
235/45ZR18	-	98	W	7.2	236	8J	669	320 AA	750	1653	340	50	BSW
235/55R18	-	104	V	7.5	245	7 1/2J	715	320 AA	900	1984	340	50	BSW
235/60R18	-	107	V	7.5	240	7J	739	320 AA	975	2149	340	50	BSW
245/40ZR18	-	97	W	7.2	248	8 1/2J	653	320 AA	730	1609	340	50	BSW
245/45ZR18	-	100	W	7.2	243	8J	677	320 AA	800	1764	340	50	BSW
205/55ZR19	-	97	W	7.2	214	6 1/2J	709	320 AA	730	1609	340	50	BSW
225/35ZR19	-	88	W	6.9	230	8J	641	320 AA	560	1235	340	50	BSW
225/40ZR19	-	93	W	7.2	230	8J	663	320 AA	650	1433	340	50	BSW
225/45ZR19	-	96	W	7.2	225	7 1/2J	685	320 AA	710	1565	340	50	BSW
225/55ZR19	-	99	W	7.5	233	7J	731	320 AA	775	1709	300	44	BSW
235/35ZR19	-	91	W	6.9	241	8 1/2J	647	320 AA	615	1356	340	50	BSW
235/55ZR19	-	105	W	7.5	245	7 1/2J	741	320 AA	925	2039	340	50	BSW
245/40ZR19	-	98	W	7.2	248	8 1/2J	679	320 AA	750	1653	340	50	BSW
245/45ZR19	-	102	W	7.2	243	8J	703	320 AA	850	1874	340	50	BSW
255/35ZR19	-	96	W	6.9	260	9J	661	320 AA	710	1565	340	50	BSW
255/40ZR19	-	100	W	7.2	260	9J	687	320 AA	800	1764	340	50	BSW
195/50R20	-	93	H	7.2	201	6J	704	320 AA	650	1433	340	50	BSW
195/55R20	-	95	H	7.2	201	6J	722	320 AA	690	1521	340	50	BSW

Performance Test



STABILITY




ECONOMY



4 SEASON



WET

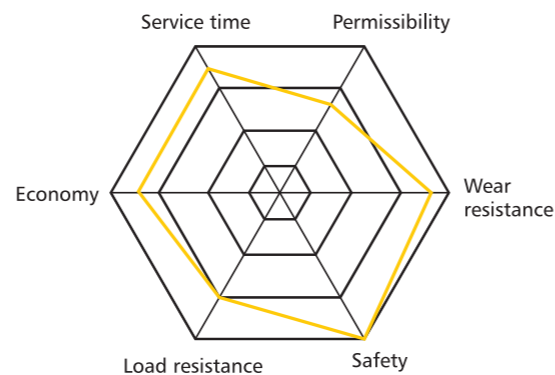

A868 M+S




UTQG: 420 AB

Four main grooves provide good driving stability and wet performance.

Reasonable pattern area, perfect collocation of every grooves.

Special tread compound, ensure tire performance stability in all kinds of weather conditions.

White sidewall rib shows extraordinary appearance.



Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load		MAX Pressure		Sidewall Description
									Kg	LBS	Kpa	Psi	
P195/75R14	-	92	S	7.8	196	5 1/2J	648	420 AB	635	1400	300	44	WR
P205/75R14	-	95	S	7.8	203	5 1/2J	664	420 AB	695	1532	300	44	WR
P205/70R15	-	95	S	7.8	209	6J	669	420 AB	680	1499	300	44	WR
P205/75R15	-	97	T	7.9	203	5 1/2J	689	420 AB	725	1598	300	44	WR
P215/75R15	-	100	T	8.2	216	6J	703	420 AB	790	1742	300	44	WR
P225/70R15	-	100	T	7.9	228	6 1/2J	697	420 AB	795	1753	300	44	WR
P225/75R15	-	102	T	7.9	223	6J	719	420 AB	850	1874	300	44	WR
P235/75R15	-	105	S	8.2	235	6 1/2J	733	420 AB	920	2028	300	44	WR

The labeling information is subject to change without notice.

Performance Test



STABILITY




4 SEASON



GOOD DESIGN



WET

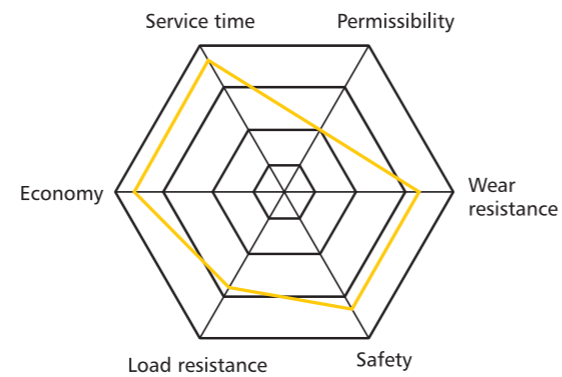

ALL TERRAIN A929 M+S



UTQG: 500 AB

Four main zigzag grooves and rough lateral blocks provide excellent traction on all kind of road conditions.

The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. The white letter styling provide a artistic image.

The block tread design with multiple-sipes provide outstanding off-road traction and reduce tread damage on off-road condition.

Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability. Special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.

Performance Test



4 SEASON




DRAINAGE



BRAKING



STABILITY

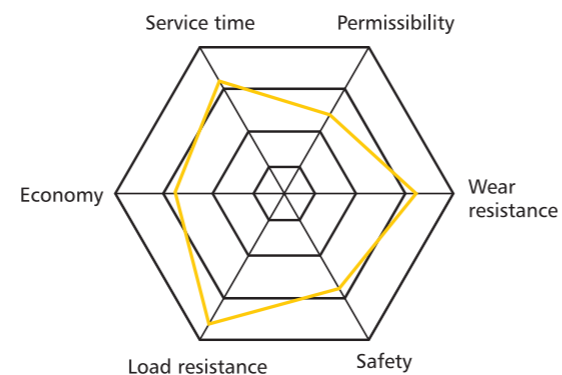

Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load		MAX Pressure		Sidewall Description
									Kg	LBS	Kpa	Psi	
P205/75R15	-	97	T	8.2	203	5 1/2J	689	500 AB	725	1598	300	44	OWL
P215/75R15	-	100	T	8.2	216	6J	703	500 AB	800	1764	300	44	OWL
P225/75R15	-	102	T	8.2	223	6J	719	500 AB	850	1874	300	44	OWL
P235/75R15 XL	-	109	S	8.7	235	6 1/2J	733	500 AB	1030	2271	340	50	OWL
P265/70R15	-	112	T	9.2	272	8J	753	500 AB	1120	2469	300	44	OWL
P215/70R16	-	100	T	8.2	221	6 1/2J	708	500 AB	800	1764	300	44	BSW
P215/70R16	-	99	T	8.2	221	6 1/2J	708	500 AB	775	1709	300	44	BSW
P225/70R16	-	101	T	8.2	228	6 1/2J	722	500 AB	825	1819	300	44	OWL
P225/70R16	-	103	T	8.2	228	6 1/2J	722	500 AB	875	1929	300	44	OWL
P235/70R16	-	106	T	8.8	240	7J	736	500 AB	950	2094	300	44	OWL
P235/70R16	-	104	T	8.8	240	7J	736	500 AB	900	1984	300	44	OWL
P245/70R16	-	107	T	8.8	248	7J	750	500 AB	975	2149	300	44	OWL
P245/70R16 XL	-	111	S	8.8	248	7J	750	500 AB	1090	2403	340	50	OWL
P245/70R16	-	106	T	8.8	248	7J	750	500 AB	950	2094	300	44	OWL
P255/70R16	-	109	T	9.2	260	7 1/2J	764	500 AB	1030	2271	300	44	OWL
P255/70R16	-	111	T	9.2	260	7 1/2J	764	500 AB	1090	2403	300	44	OWL
P265/70R16	-	112	T	9.2	272	8J	778	500 AB	1120	2469	300	44	OWL
P265/70R16	-	111	T	9.2	272	8J	778	500 AB	1090	2403	300	44	OWL
P275/70R16	-	114	T	9.2	279	8J	792	500 AB	1180	2601	300	44	OWL
P235/65R17	-	104	T	8.8	240	7J	738	500 AB	900	1984	300	44	BSW
P245/65R17	-	107	T	8.8	248	7J	750	500 AB	975	2149	300	44	BSW
P255/65R17	-	110	T	8.7	260	7 1/2J	764	500 AB	1060	2337	300	44	OWL
P265/65R17	-	110	T	8.7	272	8J	776	500 AB	1060	2337	300	44	OWL
P265/65R17	-	112	T	8.7	272	8J	776	500 AB	1120	2469	300	44	OWL
P265/70R17	-	113	T	9.2	272	8J	804	500 AB	1150	2535	300	44	OWL
P265/70R17	-	115	T	9.0	272	8J	804	500 AB	1215	2679	300	44	OWL
P275/65R17	-	115	T	9.2	279	8J	790	500 AB	1215	2679	300	44	OWL
P275/55R20 XL	-	117	T	8.7	284	8 1/2J	810	500 AB	1285	2833	340	50	BSW
P275/60R20 XL	-	119	T	8.7	279	8J	838	500 AB	1360	2998	340	50	BSW
185/75R16C	8PR	104/102	S	8.1	184	5J	684	-	900/850	1985/1875	450	65	BSW
205R16C	8PR	110/108	S	8.2	208	6J	736	-	1060/1000	2335/2205	450	65	BSW
215R15C	8PR	112/110	S	8.7	218	6J	725	-	1120/1060	2470/2337	450	65	BSW
215/70R15C	8PR	109/107	R	8.2	221	6 1/2J	683	-	1030/975	2270/2150	450	65	BSW
245/75R15C	6PR	109/107	S	11.2	248	7J	749	-	1030/975	2270/2150	375	55	BSW
255/70R15C	6PR	112/110	S	8.2	260	7 1/2J	739	-	1120/1060	2470/2335	375	55	BSW
LT235/75R15	6PR	104/101	S	11.2	235	6 1/2J	733	-	900/825	1985/1820	350	50	OWL
31x10.50R15LT	6PR	109	S	11.7	268	8 1/2J	775	-	1030	2270	350	51	OWL
LT215/85R16	10PR	115/112	S	10.9	216	6J	772	-	1215/1120	2680/2470	550	80	OWL
LT225/75R16	10PR	115/112	S	10.9	223	6J	744	-	1215/1120	2680/2470	550	80	OWL
LT235/85R16	10PR	120/116	S	11.7	235	6 1/2J	806	-	1380/1260	3042/2778	550	80	BSW
LT245/75R16	10PR	120/116	S	11.3	248	7J	774	-	1380/1260	3042/2778	550	80	OWL
LT265/75R16	10PR	123/120	S	11.7	267	7 1/2J	804	-	1550/1400	3415/3085	550	80	OWL
LT285/75R16	8PR	122/119	S	11.6	286	8J	834	-	1500/1360	3305/3000	450	65	OWL
LT245/75R17	10PR	121/118	S	11.2	248	7J	800	-	1450/1320	3195/2910	550	80	OWL
LT265/70R17	10PR	121/118	S	11.7	272	8J	804	-	1450/1320	3195/2910	550	80	OWL
LT275/65R18	10PR	123/120	S	11.2	278	8J	815	-	1550/1400	3415/3085	550	80	BSW
LT275/70R18	10PR	125/122	S	11.2	279	8J	843	-	1650/1500	3640/3305	550	80	BSW

The labeling information is subject to change without notice.

A607 M+S



UTQG: 300 AA—420 AA

Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance.

Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage.

Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.

Special tread compound delivers excellent grip on both dry and wet roads and reduce the rolling resistance to save oil and protect environment.



Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	LBS	MAX Pressure Kpa	Psi	Sidewall Description
235/65R17 XL	-	108	H	8.3	240	7J	738	420 AA	1000	2205	340	50	BSW
245/65R17	-	107	H	8.3	248	7J	750	420 AA	975	2149	300	44	BSW
255/60R17 XL	-	110	V	7.8	260	7 1/2J	738	300 AA	1060	2337	340	50	BSW
255/65R17	-	110	H	8.3	260	7 1/2J	764	420 AA	1060	2337	300	44	BSW
265/65R17	-	112	H	8.3	272	8J	776	420 AA	1120	2469	300	44	BSW
255/55R18 XL	-	109	V	8.3	265	8J	737	300 AA	1030	2271	340	50	BSW
255/60R18 XL	-	112	V	7.8	260	7 1/2J	763	300 AA	1120	2469	340	50	BSW
225/55R19 XL	-	103	V	7.0	233	7J	731	300 AA	875	1929	340	50	BSW
235/55R19 XL	-	105	V	7.8	245	7 1/2J	741	300 AA	925	2039	340	50	BSW
255/50R19 XL	-	107	V	7.8	265	8J	739	300 AA	975	2149	340	50	BSW
255/55R19 XL	-	111	V	7.8	265	8J	763	300 AA	1090	2403	340	50	BSW
285/45R19 XL	-	111	V	7.8	285	9 1/2J	739	300 AA	1090	2403	340	50	BSW
245/55R19 XL	-	107	V	7.8	253	7 1/2J	753	300 AA	975	2149	340	50	BSW
265/50R20 XL	-	111	V	7.8	277	8 1/2J	774	300 AA	1090	2403	340	50	BSW
275/55R20 XL	-	117	V	7.8	284	8 1/2J	810	300 AA	1285	2833	340	50	BSW
275/60R20 XL	-	119	V	7.8	279	8J	838	300 AA	1360	2998	340	50	BSW
285/50R20 XL	-	116	V	7.8	297	9J	794	300 AA	1250	2756	340	50	BSW

The labeling information is subject to change without notice.

Performance Test



COMFORT




HIGH PERFORMANCE



SILENCE



DRAINAGE

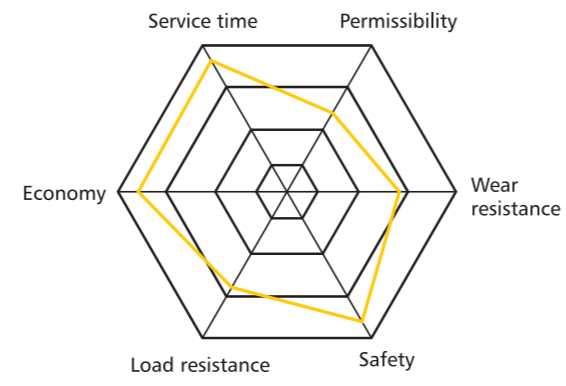

A919 M+S



UTQG: 420 AA

Four wide circumferential tread grooves deliver the ride stability and offer excellent performance on wet conditions. Improved grooves and bead profile design offer better ride stability, endurance and handling performance.

The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. Continuous tread blocks on both shoulder give great support to enhance the ride stability when cornering.

Variable pitch pattern and solid center ribs improve the ride stability, reduce the noise and deliver a comfortable ride.

High-density sipes with special compound deliver a smooth ride and improve traction on dry and wet roads. Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability.

Performance Test



COMFORT




HIGH PERFORMANCE



SILENCE



DRAINAGE

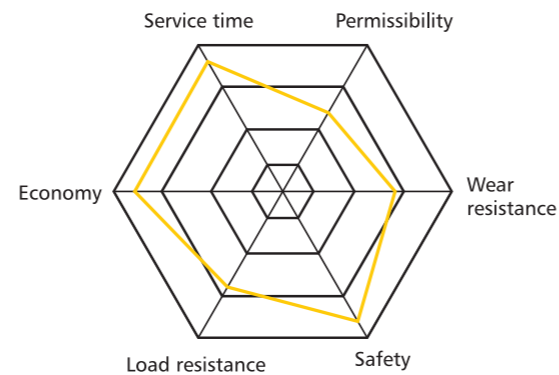

Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load LBS	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
215/70R16	-	100	H	8.3	221	6 1/2J	708	420 AA	800	1764	300	44	BSW
225/70R16 XL	-	107	H	8.3	228	6 1/2J	722	420 AA	975	2149	340	50	BSW
235/70R16	-	106	H	8.3	240	7J	736	420 AA	950	2094	300	44	BSW
245/70R16	-	107	H	8.3	248	7J	750	420 AA	975	2149	300	44	BSW
245/70R16 XL	-	111	H	8.3	248	7J	750	420 AA	1090	2403	340	50	BSW
255/65R16	-	109	H	8.3	260	7 1/2J	738	420 AA	1030	2271	300	44	BSW
255/70R16	-	111	H	8.3	260	7 1/2J	764	420 AA	1090	2403	300	44	BSW
265/70R16	-	112	H	8.3	272	8J	778	420 AA	1120	2469	300	44	BSW
275/70R16	-	114	H	8.3	279	8J	792	420 AA	1180	2601	300	44	BSW
215/60R17	-	96	H	8.3	221	6 1/2J	690	420 AA	710	1565	300	44	BSW
215/65R17	-	99	H	8.3	221	6 1/2J	712	420 AA	775	1709	300	44	BSW
225/60R17	-	99	H	8.3	228	6 1/2J	702	420 AA	775	1709	300	44	BSW
225/65R17	-	102	H	8.3	228	6 1/2J	724	420 AA	850	1874	300	44	BSW
235/60R17	-	102	H	8.3	240	7J	714	420 AA	850	1874	300	44	BSW
235/60R17 XL	-	106	H	8.3	240	7J	714	420 AA	950	2094	340	50	BSW
235/65R17	-	104	H	8.3	240	7J	738	420 AA	900	1984	300	44	BSW
245/65R17	-	107	H	8.3	248	7J	750	420 AA	975	2149	300	44	BSW
245/65R17 XL	-	111	H	8.3	248	7J	750	420 AA	1090	2403	340	50	BSW
255/65R17	-	110	H	8.3	260	7 1/2J	764	420 AA	1060	2337	300	44	BSW
265/65R17	-	112	H	8.3	272	8J	776	420 AA	1120	2469	300	44	BSW
265/70R17	-	115	H	8.3	272	8J	804	420 AA	1215	2679	300	44	BSW
275/65R17	-	115	H	8.3	279	8J	790	420 AA	1215	2679	300	44	BSW
285/65R17	-	116	H	8.3	292	8 1/2J	802	420 AA	1250	2756	300	44	BSW
225/55R18	-	98	H	8.3	233	7J	705	420 AA	750	1653	300	44	BSW
225/60R18 XL	-	104	H	8.3	228	6 1/2J	727	420 AA	900	1984	340	50	BSW
235/55R18 XL	-	104	H	8.3	245	7 1/2J	715	420 AA	900	1984	340	50	BSW
235/60R18 XL	-	107	H	8.3	240	7J	739	420 AA	975	2149	340	50	BSW
235/65R18 XL	-	110	H	8.2	240	7J	763	420 AA	1060	2337	340	50	BSW
245/60R18	-	105	H	8.2	248	7J	751	420 AA	925	2039	300	44	BSW
255/70R18	-	113	H	8.2	260	7 1/2J	815	420 AA	1150	2535	300	44	BSW
265/60R18	-	110	H	8.3	272	8J	775	420 AA	1060	2337	300	44	BSW
275/60R18	-	113	H	8.3	179	8J	787	420 AA	1150	2535	300	44	BSW
275/65R18	-	116	H	8.2	279	8J	815	420 AA	1250	2756	300	44	BSW
285/60R18	-	116	H	8.3	292	8 1/2J	799	420 AA	1250	2756	300	44	BSW
LT225/75R16	10PR	115/112	S	8.3	223	6 J	744	-	1215/1120	2680/2470	550	80	BSW
LT235/85R16	10PR	120/116	S	8.3	235	6 1/2J	806	-	1380/1260	3042/2778	550	80	BSW
LT245/75R16	10PR	120/116	S	8.3	248	7J	774	-	1380/1260	3042/2778	550	80	BSW
LT265/75R16	10PR	123/120	S	8.3	267	7 1/2J	804	-	1550/1400	3415/3085	550	80	BSW
LT245/75R17	10PR	121/118	S	8.3	248	7J	800	-	1450/1320	3195/2910	550	80	BSW
LT265/70R17	10PR	121/118	S	8.3	272	8J	804	-	1450/1320	3195/2910	550	80	BSW

The labeling information is subject to change without notice.



STAGGERED SHOULDER LUGS: Provides traction in off-road environments.

Slingstone structure: Protect the bottom of groove from sharp stone.

STEP BLOCK EDGE: Step block edge provide additional biting edges for more traction.

Shoulder and block design: Shoulder grooves are arranged in alternating widths and lengths to clear mud and maintain traction. Irregular block provide more traction on different road condition.

Performance Test



4 SEASON



DRAINAGE



BRAKING



STABILITY



SHREDDER RT M+S

Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	LBS	MAX Pressure Kpa	Psi	Sidewall Description
LT235/85R16	10PR	120/116	Q	11	235	6 1/2J	806	-	1380/1260	3042/2778	550	80	RSW/YSW/BSW/GSW
LT225/75R16	10PR	115/112	Q	11	223	6J	744	-	1215/1120	2680/2470	550	80	RSW/YSW/BSW/GSW
LT235/75R15	8PR	110/107	Q	11	235	6 1/2J	733	-	1060/975	2335/2150	450	65	RSW/YSW/BSW/GSW
LT245/75R16	10PR	120/116	Q	11	248	7J	774	-	1380/1260	3042/2778	550	80	RSW/YSW/BSW/GSW
LT265/75R16	10PR	123/120	Q	11	267	7 1/2J	804	-	1550/1400	3415/3085	550	80	RSW/YSW/BSW/GSW
LT285/75R16	10PR	126/123	Q	11	286	8J	834	-	1700/1550	3750/3415	550	80	RSW/YSW/BSW/GSW
LT215/70R16	6PR	100/97	Q	11	221	6 1/2J	708	-	800/730	1765/1610	350	50	RSW/YSW/BSW/GSW
LT245/70R16	8PR	113/110	Q	11	248	7J	750	-	1150/1060	2535/2335	450	65	RSW/YSW/BSW/GSW
LT245/70R17	10PR	119/116	Q	11	248	7J	776	-	1360/1250	3000/2755	550	80	RSW/YSW/BSW/GSW
LT255/70R16	10PR	120/117	Q	11	260	7 1/2J	764	-	1400/1285	3085/2835	550	80	RSW/YSW/BSW/GSW
LT265/70R16	10PR	121/118	Q	11	272	8J	778	-	1450/1320	3195/2910	550	80	RSW/YSW/BSW/GSW
LT265/70R17	10PR	121/118	Q	11	272	8J	804	-	1450/1320	3195/2910	550	80	RSW/YSW/BSW/GSW
LT275/70R16	8PR	119/116	Q	11	279	8J	792	-	1360/1250	3000/2755	450	65	RSW/YSW/BSW/GSW
LT225/65R17	8PR	107/103	Q	11	228	6 1/2J	724	-	975/875	2150/1930	450	65	RSW/YSW/BSW/GSW
LT245/65R17	10PR	117/114	Q	11	248	7J	750	-	1285/1180	2835/2600	550	80	RSW/YSW/BSW/GSW
LT255/65R17	8PR	114/110	Q	11	260	7 1/2J	764	-	1180/1060	2600/2335	450	65	RSW/YSW/BSW/GSW
LT265/70R18	10PR	124/121	Q	11	272	8J	829	-	1600/1450	3525/3195	550	80	RSW/YSW/BSW/GSW
LT285/70R17	10PR	121/118	Q	11	292	8 1/2J	832	-	1450/1320	3195/2910	550	80	RSW/YSW/BSW/GSW
LT305/70R16	10PR	124/121	Q	11	311	9J	834	-	1600/1450	3525/3195	450	65	RSW/YSW/BSW/GSW
LT315/70R17	10PR	121/118	Q	11	323	9 1/2J	874	-	1450/1320	3195/2910	450	65	RSW/YSW/BSW/GSW
LT265/65R18	10PR	122/119	Q	11	272	8J	801	-	1500/1360	3305/3000	550	80	RSW/YSW/BSW/GSW
LT275/65R18	10PR	123/120	Q	11	279	8J	815	-	1550/1400	3415/3085	550	80	RSW/YSW/BSW/GSW
LT265/60R20	10PR	121/118	Q	11	272	8J	826	-	1450/1320	3195/2910	550	80	RSW/YSW/BSW/GSW
LT255/55R18	8PR	109/105	Q	11	265	8J	737	-	1030/925	2270/2040	450	65	RSW/YSW/BSW/GSW
LT275/55R20	10PR	120/117	Q	11	284	8 1/2J	810	-	1400/1285	3085/2835	550	80	RSW/YSW/BSW/GSW
LT265/50R20	10PR	115/112	Q	11	277	8 1/2J	774	-	1215/1120	2680/2470	550	80	RSW/YSW/BSW/GSW
LT285/50R20	10PR	119/116	Q	11	297	9J	794	-	1360/1250	3000/2755	550	80	RSW/YSW/BSW/GSW
31x10.50R15LT	6PR	109	Q	13	268	8 1/2J	775	-	1030	2270	350	50	RSW/YSW/BSW/GSW
33x12.50R18LT	10PR	118	Q	13	318	10J	826	-	1320	2910	450	65	RSW/YSW/BSW/GSW
33x12.50R17LT	10PR	120	Q	13	318	10J	826	-	1400	3085	450	65	RSW/YSW/BSW/GSW
35x12.50R18LT	10PR	123	Q	13	318	10J	883	-	1550	3415	450	65	RSW/YSW/BSW/GSW
255/55R19	-	111	Q	11	265	8J	763	-	1090	2403	340	50	RSW/YSW/BSW/GSW



ROCK SHREDDER-R/T M+S

Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	LBS	MAX Pressure Kpa	Psi	Sidewall Description
33x12.50R20LT	10PR	114	Q	13.1	318	10.0J	826	-	1180	2600	450	65	RSW/YSW/BSW/GSW
35x12.50R20LT	10PR	121	Q	13.1	318	10.0J	877	-	1450	3195	450	65	RSW/YSW/BSW/GSW
33x12.50R22LT	10PR	109	Q	13.1	318	10.0J	826	-	1030	2270	450	65	RSW/YSW/BSW/GSW
35x12.50R22LT	10PR	117	Q	13.1	318	10.0J	877	-	1285	2835	450	65	RSW/YSW/BSW/GSW
LT265/65R17	10PR	120/117	S	11	272	8J	776	-	1400/1285	3085/2835	550	80	OWL
LT265/60R18	10PR	119/116	S	11	272	8J	775	-	1360/1250	3000/2755	550	80	OWL

MUD TERRAIN A929 M+S



Three main zigzag grooves and aggressive pattern design provide outstanding traction on all of road conditons.

High void ratio and open shoulder offer excellent resistance to aquaplaning and self-cleaning performance.

The blockt road design with multiple-sipes provide outstanding off-road condition. Special casing profile and solid shoulder pattern enhance the max traction and conering performance.

Jointless Nylon band and strong structure design provide the strong carcass to enhance the reliability and durability. Special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.



Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load LBS	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
31×10.50R15LT	6PR	109	Q	13.2	268	8 1/2J	775	-	1030	2270	350	51	BSW
33×12.50R15LT	6PR	108	Q	13.2	318	10J	826	-	1000	2205	250	35	BSW
35×12.50R15LT	6PR	113	Q	13.2	318	10J	877	-	1150	2535	250	35	BSW
LT235/85R16	10PR	120/116	Q	13.2	235	6 1/2J	806	-	1380/1260	3042/2778	550	80	BSW
LT245/75R16	10PR	120/116	Q	13.2	248	7J	774	-	1380/1260	3042/2778	550	80	BSW
LT265/75R16	10PR	123/120	Q	13.2	267	7 1/2J	804	-	1550/1400	3415/3085	550	80	BSW
LT285/75R16	10PR	126/123	Q	13.2	286	8J	834	-	1700/1550	3750/3415	550	80	BSW
305/70R16LT	10PR	124/121	Q	13.2	311	9J	840	-	1600/1450	3525/3195	450	65	BSW
315/75R16LT	10PR	127/124	Q	13.2	313	8 1/2J	884	-	1750/1600	3860/3525	450	65	BSW
LT265/70R17	10PR	121/118	Q	13.2	272	8J	804	-	1450/1320	3195/2910	550	80	BSW
LT285/70R17	10PR	121/118	Q	13.2	292	8 1/2J	832	-	1450/1320	3195/2910	550	80	BSW
33×12.50R17LT	10PR	120	Q	13.2	318	10J	832	-	1400	3085	450	65	BSW
35×12.5R17LT	10PR	121	Q	13.2	318	10J	877	-	1450	3195	450	65	BSW
37×12.50R17LT	8PR	124	Q	13.2	318	10J	934	-	1600	3525	350	50	BSW
33×12.50R18LT	10PR	118	Q	13.2	318	10J	832	-	1320	2910	450	65	BSW
35×12.50R18LT	10PR	123	Q	13.2	318	10J	883	-	1550	3415	450	65	BSW

Performance Test



GOOD DESIGN




4 SEASON



BRAKING



DRAINAGE

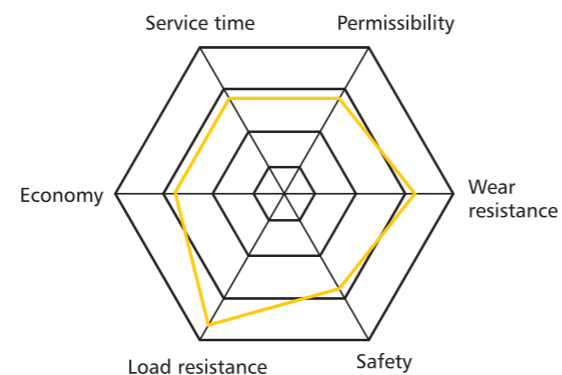

MUD TERRAIN A939 M+S



Off-Road Maximum Traction Tyre, designed for extreme 4X4 application, confidence in performance on muddy, snowy and rocky terrain as well as sealed road performance, with extra ground clearance, higher load-carrying capacity, and greater ability to go off-road. 4X4 enthusiasts know it for its long wear, low noise and aggressive tread pattern.


Strategically placed ribs within the lateral grooves of the tread design help to discharge stones and resist stone drilling.

Specially developed tread compound helps resist the cutting, tearing and chunking commonly developed in extended off-road applications.

Strategically placed in the lower side wall area, a raised rim protector helps protect the wheel and tyre from hazards in off-road driving conditions.

Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load		MAX Pressure		Sidewall Description
									Kg	LBS	Kpa	Psi	
33x12.50R20LT	10PR	114	Q	14.2	318	10J	826	-	1180	2600	450	65	BSW
35x12.50R20LT	10PR	121	Q	14.2	318	10J	877	-	1450	3195	450	65	BSW
35x12.50R22LT	10PR	117	Q	14.2	318	10J	877	-	1285	2835	450	65	BSW
37x12.50R22LT	10PR	123	Q	14.2	318	10J	928	-	1550	3415	450	65	BSW

Performance Test

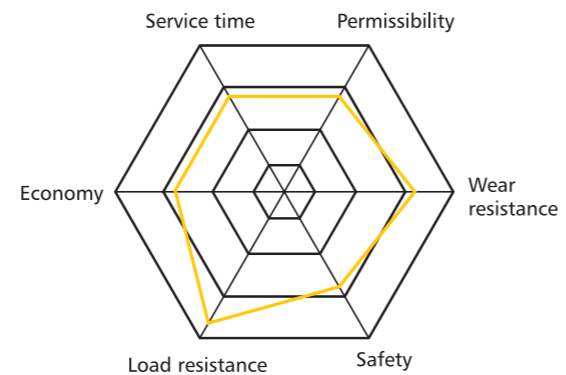

ASV909 M+S




- Reliability in all weather conditions**
 The large V-shaped single-guide pattern design can ensure stable and reliable performance even on gravel, mud, grass and snow, and solve your worries on the road.
- High carrying capacity**
 The new 3D steel sheet adopts the "two bends and straight" horizontal layout to ensure the strength of the pattern block under the conditions of high load and high wear, and improve durability and safety.
- Handles slippery and snowy surfaces easily**
 Two wide Z-shaped vertical trenches to ensure smooth drainage in rainy days, dense small trenches, can effectively puncture the water film and easily deal with rainwater and snow-covered roads.
- Super wear-resistant formula**
 Specially developed new four-season wear-resistant formula, effectively improve the service life of tires, bring you considerable economic benefits.

Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load LBS	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
175/65R14C	6PR	90/88	T	8	177	5J	584	-	600/560	1325/1235	375	55	BSW
175/70R14C	6PR	95/93	T	8	177	5J	602	-	690/650	1520/1435	375	55	BSW
195/70R15C	8PR	104/102	R	8.3	201	6J	655	-	900/850	1985/1875	450	65	BSW
205/70R15C	8PR	106/104	R	8.6	209	6J	669	-	950/900	2095/1985	450	65	BSW
215/65R15C	6PR	104/102	T	8.6	221	6 1/2J	661	-	900/850	1985/1875	375	55	BSW
215/70R15C	8PR	109/107	R	8.6	221	6 1/2J	683	-	1030/975	2270/2150	450	65	BSW
225/70R15C	8PR	112/110	R	8.6	228	6 1/2J	697	-	1120/1060	2470/2335	450	65	BSW
185/75R16C	8PR	104/102	R	8.3	184	5J	684	-	900/850	1985/1875	475	69	BSW
195/60R16C	6PR	99/97	H	8.3	201	6J	640	-	775/730	1710/1610	375	55	BSW
195/65R16C	8PR	104/102	T	8.3	201	6J	660	-	900/850	1985/1875	475	69	BSW
195/75R16C	8PR	107/105	R	8.3	196	5 1/2J	698	-	975/925	2150/2040	475	69	BSW
205/65R16C	8PR	107/105	T	8.6	209	6J	672	-	975/925	2150/2040	475	69	BSW
205/75R16C	10PR	113/111	R	8.6	203	5 1/2J	714	-	1150/1090	2535/2405	525	75	BSW
215/60R16C	6PR	103/101	T	8.6	221	6 1/2J	664	-	875/825	1930/1820	375	55	BSW
215/65R16C	8PR	109/107	T	8.6	221	6 1/2J	686	-	1030/975	2270/2150	475	69	BSW
215/75R16C	8PR	113/111	R	8.6	216	6J	728	-	1150/1090	2535/2405	475	69	BSW
225/65R16C	8PR	112/110	R	8.6	228	6 1/2J	698	-	1120/1060	2470/2335	475	69	BSW
225/75R16C	10PR	121/120	R	8.6	223	6J	744	-	1450/1400	3195/3085	575	85	BSW
235/65R16C	8PR	115/113	R	8.6	240	7J	712	-	1215/1150	2680/2535	475	70	BSW
215/60R17C	8PR	109/107	T	8.6	221	6 1/2J	690	-	1030/975	2270/2150	475	69	BSW

The labeling information is subject to change without notice.

Performance Test

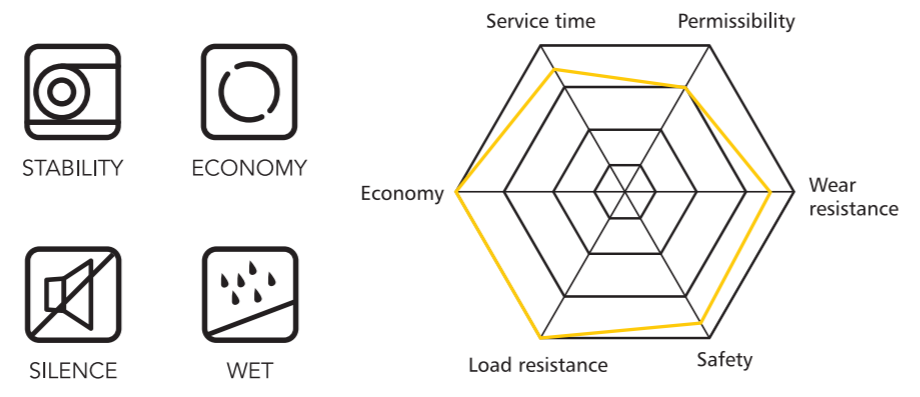

A867 M+S



Three main zigzag grooves combined with lateral blocks provide excellent ride stability and great traction on all of road condition.

Continuous tread patterns on shoulder and solid shoulder ribs provide responsive handling and even wear.

Variable pitch patterns and multi-knife-cut tread pattern reduce vibration to offer the comfort and quiet ride.

Reinforced structure and special abrasion-resistant tread compound deliver extra puncture resistance and load bearing capability with more mileage.

Performance Test



STABILITY




ECONOMY



SILENCE



WET

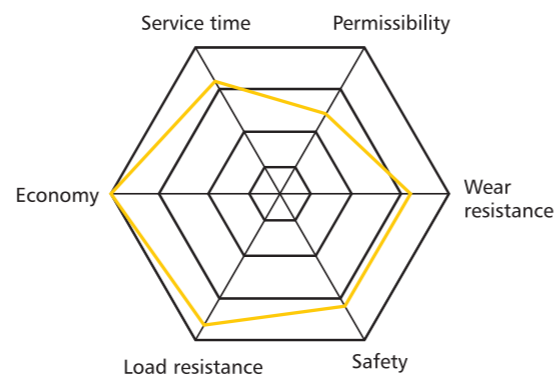

Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load LBS	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
145R12C	8PR	86/84	Q	7.8	147	4.00B	542	-	530/500	1170/1100	450	65	BSW
155R12C	8PR	88/86	Q	7.8	157	4.50B	550	-	560/530	1235/1170	450	65	BSW
155R13C	6PR	85/83	Q	7.8	157	4.50B	578	-	515/487	1135/1075	350	50	BSW
155R13C	8PR	90/88	Q	7.8	157	4.50B	578	-	600/560	1325/1235	450	65	BSW
165R13C	6PR	91/89	R	7.8	167	4.50B	596	-	615/580	1355/1280	375	55	BSW
165R13C	8PR	94/93	R	7.8	167	4.50B	596	-	670/650	1475/1435	450	65	BSW
165/70R13C	6PR	88/86	S	7.8	170	5.00B	562	-	560/530	1235/1170	375	55	BSW
175R14C	8PR	99/98	R	7.8	178	5J	634	-	775/750	1710/1655	450	65	BSW
165/70R14C	6PR	89/87	R	7.8	170	5J	588	-	580/545	1280/1200	375	55	BSW
175/65R14C	6PR	90/88	T	8.2	177	5J	584	-	600/560	1325/1235	375	55	BSW
175/70R14C	8PR	95/93	S	7.8	177	5J	602	-	690/650	1520/1435	375	55	BSW
185R14C	8PR	102/100	R	8.2	188	5 1/2J	650	-	850/800	1875/1765	450	65	BSW
195R14C	8PR	106/104	R	8.2	198	5 1/2J	666	-	950/900	2095/1985	450	65	BSW
205R14C	8PR	109/107	R	8.2	208	6J	686	-	1030/975	2270/2150	450	65	BSW
205R14LT	8PR	107/105	R	8.2	208	6J	684	-	975/925	2150/2040	450	65	BSW
195/70R15C	8PR	104/102	R	9.2	201	6J	655	-	900/850	1985/1875	450	65	BSW
195R15C	8PR	106/104	R	8.2	196	5 1/2J	693	-	950/900	2095/1985	450	65	BSW
195/70R15C	8PR	99/96	R	9.2	201	6J	655	-	775/710	1710/1565	450	65	BSW
205/70R15C	8PR	106/104	R	8.5	209	6J	669	-	950/900	2095/1985	450	65	BSW
215/65R15C	6PR	104/102	R	8.5	221	6 1/2J	661	-	900/850	1985/1875	375	55	BSW
215/70R15C	8PR	109/107	R	8.5	221	6 1/2J	683	-	1030/975	2270/2150	450	65	BSW
225/70R15C	8PR	112/110	R	8.7	228	6 1/2J	697	-	1120/1060	2470/2335	450	65	BSW
175/75R16C	8PR	101/99	R	7.8	177	5J	668	-	825/775	1820/1710	475	69	BSW
185/75R16C	8PR	104/102	R	8.1	184	5J	684	-	900/850	1985/1875	475	69	BSW
185/75R16C	8PR	100/97	R	8.1	184	5J	684	-	800/730	1765/1610	450	65	BSW
195/75R16C	8PR	107/105	R	8.2	196	5 1/2J	698	-	975/925	2150/2040	475	69	BSW
195/65R16C	8PR	104/102	R	8.4	201	6J	660	-	900/850	1985/1875	475	69	BSW
195/75R16C	8PR	102/99	R	8.8	196	5 1/2J	698	-	850/775	1875/1710	450	65	BSW
195/65R16C	8PR	99/96	R	8.4	201	6J	660	-	775/710	1710/1565	450	65	BSW
205/65R16C	8PR	107/105	T	8.7	209	6J	672	-	975/925	2150/2040	475	69	BSW
205/65R16C	8PR	101/98	T	8.7	209	6J	672	-	825/750	1820/1655	450	65	BSW
205/75R16C	8PR	110/108	R	8.5	203	5 1/2J	714	-	1060/1000	2335/2205	475	69	BSW
215/75R16C	8PR	113/111	R	8.5	216	6J	728	-	1150/1090	2535/2405	475	69	BSW
215/65R16C	8PR	109/107	T	8.7	221	6 1/2J	686	-	1030/975	2270/2150	475	69	BSW
225/65R16C	8PR	112/110	T	8.7	228	6 1/2J	698	-	1120/1060	2470/2335	475	69	BSW
235/65R16C	8PR	115/113	R	10	240	7J	712	-	1215/1150	2680/2535	475	69	BSW

The labeling information is subject to change without notice.

A866 M+S




Reinforced structure and special abrasion resistant tread compound deliver extra puncture resistance and load bearing capability with more mileage.

Three main zigzag grooves combined with lateral blocks provide excellent ride stability and great traction on all kinds of road conditions.

Continuous tread patterns on shoulder and solid shoulder ribs responsive handling and even wear.

White sidewall rib shows extraordinary appearance.



Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load		MAX Pressure		Sidewall Description
									Kg	LBS	Kpa	Psi	
155R13C	6PR	85/83	R	7.8	157	4.50B	578	-	515/487	1135/1075	350	50	BSW
155R13C	8PR	90/88	R	7.8	157	4.50B	578	-	600/560	1325/1235	450	65	BSW
165R13C	6PR	91/89	R	7.8	167	4.50B	596	-	615/580	1355/1280	375	55	BSW
165R13C	8PR	94/93R	R	7.8	167	4.50B	596	-	670/650	1475/1435	450	65	BSW
185R14C	8PR	102/100	R	8.2	188	5 1/2J	650	-	850/800	1875/1765	450	65	BSW
195R14C	8PR	106/104	R	8.2	198	5 1/2J	666	-	950/900	2095/1985	450	65	WR
205/75R14C	8PR	109/107	R	8.7	203	5 1/2J	664	-	1030/975	2270/2150	475	69	WR
195R15C	8PR	106/104	R	8.2	196	5 1/2J	693	-	950/900	2095/1985	450	65	WR
185R15C	8PR	103/102	R	8.2	188	5 1/2J	674	-	875/850	1930/1875	450	65	WR
205/75R15C	8PR	109/107	R	8.7	203	5 1/2J	689	-	1030/975	2270/2150	475	69	WR

Performance Test



STABILITY




ECONOMY



4 SEASON



DRAINAGE

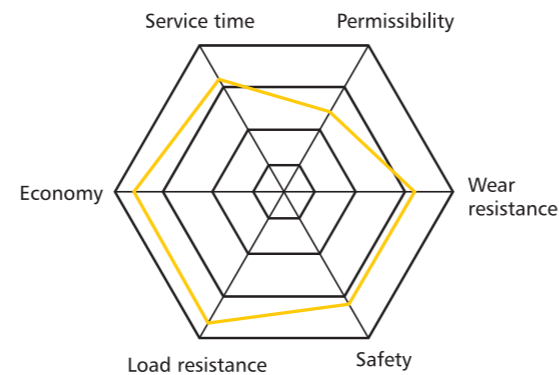

GAZILL M+S



* Multi-sipe shoulder can removes water quickly and give more tire tread on road to prevent hydroplaning.

* Lateral blocks provide better grip performance in different road conditions.

* Vaeiable Pitch patterns can reduce road noise to offer quiet ride and increase traction.

Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load		MAX Pressure		Sidewall Description
									Kg	LBS	Kpa	Psi	
185/75R16C	8PR	104/102	R	8.2	184	5J	648	-	900/850	1985/1875	475	69	BSW
195/75R16C	8PR	107/105	R	8.1	196	5.1/2J	698	-	975/925	2150/2040	475	69	BSW

Performance Test



STABILITY



SILENCE



DRAINAGE



BRACING

A701 M+S



V-shaped embedded pattern design:

The embedded pattern design has both appearance and practicality, and the sharp-angle pattern block can effectively pierce the water film to enhance the grip.

Optimized horizontal groove design:

The horizontal grooves of alternating thick and thin meet the safety of driving in the changeable snow.

Z-shaped longitudinal groove design

The zigzag-shaped longitudinal grooves help the blocks to stabilize on the snow surface, and can effectively cooperate to ensure the snow passing ability in the forward direction.

Rotation pattern

It satisfies the comfortable driving texture while improving the driving stability, improving the passability of the snow surface, and ensuring driving safety.

Performance Test



DRAINAGE



COMFORT



STABILITY



SNOW&ICE



Size	Inch	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	MAX Load Kg	MAX Load LBS	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
155/80R13	13"	79	T	8.1	157	4 1/2J	578	437	963	300	44	BSW
155/65R13	13"	73	T	8.1	157	4 1/2J	532	365	805	300	44	BSW
155/70R13	13"	75	T	8.1	157	4 1/2J	548	387	853	300	44	BSW
175/70R13	13"	82	T	8.3	177	5J	576	475	1047	300	44	BSW
155/65R14	14"	75	T	8.1	157	4 1/2J	558	387	853	300	44	BSW
165/60R14	14"	75	T	8.1	170	5J	554	387	853	300	44	BSW
165/65R14	14"	79	T	8.1	170	5J	570	437	963	300	44	BSW
165/70R14 XL	14"	85	T	8.1	170	5J	588	515	1135	340	50	BSW
175/65R14	14"	82	T	8.3	177	5J	584	475	1047	300	44	BSW
175/70R14 XL	14"	88	T	8.3	177	5J	602	560	1235	340	50	BSW
185/55R14	14"	80	T	8.3	194	6J	560	450	992	300	44	BSW
185/60R14	14"	82	T	8.3	189	5 1/2J	578	475	1047	300	44	BSW
185/65R14	14"	86	T	8.3	189	5 1/2J	596	530	1168	300	44	BSW
185/70R14 XL	14"	92	T	8.3	189	5 1/2J	616	630	1389	340	50	BSW
195/70R14 XL	14"	95	T	8.3	201	6J	630	690	1521	340	50	BSW
155/60R15	15"	74	T	8.1	157	4 1/2J	567	375	827	300	44	BSW
165/60R15 XL	15"	81	T	8.1	170	5J	579	462	1019	340	50	BSW
165/65R15	15"	81	T	8.1	170	5J	595	462	1019	300	44	BSW
175/55R15	15"	77	T	8.3	182	5 1/2J	573	412	908	300	44	BSW
175/60R15	15"	81	T	8.3	177	5J	591	462	1019	300	44	BSW
175/65R15	15"	84	T	8.3	177	5J	609	500	1102	300	44	BSW
185/55R15	15"	82	H	8.3	194	6J	585	475	1047	300	44	BSW
185/60R15 XL	15"	88	H	8.3	189	5 1/2J	603	560	1235	340	50	BSW
185/65R15	15"	88	H	8.3	189	5 1/2J	621	560	1235	300	44	BSW
195/60R15	15"	88	H	8.3	201	6J	615	560	1235	300	44	BSW
195/65R15 XL	15"	95	T	8.3	201	6 J	635	690	1521	340	50	BSW
205/60R15	15"	91	H	8.5	209	6 J	627	615	1356	300	44	BSW
205/65R15	15"	94	H	8.5	209	6J	647	670	1477	300	44	BSW
205/70R15	15"	96	T	8.5	209	6 J	669	710	1565	300	44	BSW
215/65R15 XL	15"	100	H	8.5	221	6 1/2J	661	800	1764	340	50	BSW
215/70R15	15"	98	T	8.5	221	6 1/2J	683	750	1653	300	44	BSW
195/50R16 XL	16"	88	H	8.3	201	6 J	602	560	1235	340	50	BSW
205/55R16	16"	91	H	8.3	214	6 1/2J	632	615	1356	300	44	BSW
205/60R16 XL	16"	96	H	8.5	209	6J	652	710	1565	340	50	BSW
215/60R16 XL	16"	99	H	8.5	221	6 1/2J	664	775	1709	340	50	BSW
215/65R16	16"	98	H	8.5	221	6 1/2J	686	750	1653	300	44	BSW
215/70R16	16"	100	T	8.5	221	6 1/2J	708	800	1764	300	44	BSW
225/60R16	16"	98	H	8.5	228	6 1/2J	676	750	1653	300	44	BSW
225/65R16	16"	100	H	8.5	228	6 1/2J	698	800	1764	300	44	BSW
225/70R16 XL	16"	107	T	8.5	228	6 1/2J	722	975	2149	340	50	BSW
235/65R16	16"	103	H	8.5	240	7J	712	875	1929	300	44	BSW
235/70R16	16"	106	T	8.5	240	7J	736	950	2094	300	44	BSW
245/70R16 XL	16"	111	T	8.5	248	7J	750	1090	2403	340	50	BSW
215/60R17	17"	96	H	8.5	221	6 1/2J	690	710	1565	300	44	BSW
215/65R17	17"	99	H	8.5	221	6 1/2J	712	775	1709	300	44	BSW
225/60R17	17"	99	H	8.5	228	6 1/2J	702	775	1709	300	44	BSW
225/65R17	17"	102	T	8.5	228	6 1/2J	724	850	1874	300	44	BSW
235/65R17 XL	17"	108	T	8.5	240	7J	738	1000	2205	340	50	BSW
245/65R17 XL	17"	111	T	8.5	248	7J	750	1090	2403	340	50	BSW

A702 M+S



Asymmetric pattern

Match the performance requirements of high-end sports cars. Wide inner gully design enhances drainage effect. The outside of the dense pattern block provides strong handling performance.

Blade cut angular pattern block

Provides higher grip and the ability to break through the water film, deep into the snow surface. 3D wavy steel sheet design provides good grip while increasing tread hardness to meet extreme handling.

Folding groove:

It can effectively improve the fault tolerance rate in all directions, assist in controlling the vehicle attitude, and improve the ultimate controllability.

Silica formula

The special silica formula guarantees the softness on the snow while increasing the strength of the pattern blocks to meet the controllability.

Performance Test



DRAINAGE



STABILITY



BRAKING



SNOW&ICE



Size	Inch	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	MAX Load Kg	MAX Load LBS	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
195/55R16XL	16"	91	H	8	201	6J	620	615	1356	340	50	BSW
215/45R16XL	16"	90	H	8	213	7J	600	600	1323	340	50	BSW
215/55R16XL	16"	97	H	8	226	7J	642	730	1609	340	50	BSW
265/70R16	16"	112	H	8.3	272	8J	778	1120	2469	300	44	BSW
265/65R17	17"	112	T	8.3	272	8J	776	1120	2469	300	44	BSW
205/50R17XL	17"	93	V	8	214	6 1/2J	638	650	1433	340	50	BSW
205/55R17XL	17"	95	V	8	214	6 1/2 J	658	690	1521	340	50	BSW
215/40R17XL	17"	87	V	8	218	7 1/2 J	604	545	1201	340	50	BSW
215/45R17XL	17"	91	V	8	213	7J	626	615	1356	340	50	BSW
215/50R17XL	17"	95	V	8	226	7J	648	690	1521	340	50	BSW
215/55R17XL	17"	98	V	8	226	7J	668	750	1653	340	50	BSW
225/45R17XL	17"	94	V	8	225	7 1/2J	634	670	1477	340	50	BSW
225/50R17XL	17"	98	V	8	233	7J	658	750	1653	340	50	BSW
225/55R17XL	17"	101	V	8	223	7J	680	825	1819	340	50	BSW
235/55R17XL	17"	103	V	8	245	7 1/2J	690	875	1929	340	50	BSW
245/40R17XL	17"	95	V	8	248	8 1/2 J	628	690	1521	340	50	BSW
245/45R17XL	17"	99	V	8	243	8J	652	775	1709	340	50	BSW
215/45R18XL	18"	93	V	8	213	7J	651	650	1433	340	50	BSW
215/55R18XL	18"	99	V	8	226	7J	693	775	1709	340	50	BSW
225/40R18XL	18"	92	V	8	230	8J	637	630	1389	340	50	BSW
225/45R18XL	18"	95	V	8	225	7 1/2J	659	690	1521	340	50	BSW
225/55R18	18"	98	V	8	233	7J	705	750	1653	300	44	BSW
235/40R18XL	18"	95	V	8	241	8 1/2 J	645	690	1521	340	50	BSW
235/45R18XL	18"	98	V	8	236	8J	669	750	1653	340	50	BSW
235/50R18XL	18"	101	V	8	245	7 1/2 J	693	825	1819	340	50	BSW
255/40R18XL	18"	99	V	8	260	9J	661	730	1609	340	50	BSW
255/45R18XL	18"	103	V	8	255	8 1/2 J	687	875	1929	340	50	BSW
225/40R19XL	19"	93	V	8	230	8J	663	650	1433	340	50	BSW
255/35R19XL	19"	96	V	8	260	9J	661	710	1565	340	50	BSW
225/55R19XL	19"	103	V	8	233	7J	728	875	1929	340	50	BSW
225/45R19XL	19"	96	V	8	225	7 1/2 J	685	710	1565	340	50	BSW
235/50R19XL	19"	103	V	8	245	7 1/2 J	719	875	1929	340	50	BSW
255/40R19XL	19"	100	V	8	260	9J	687	800	1764	340	50	BSW
255/45R19XL	19"	104	V	8	255	8 1/2 J	715	900	1984	340	50	BSW
245/40R19XL	19"	98	V	8	248	8 1/2 J	679	750	1653	340	50	BSW
275/35R19XL	19"	100	V	8	278	9 1/2J	675	800	1764	340	50	BSW
255/50R20XL	20"	109	V	8	265	8J	764	1030	2271	340	50	BSW
275/55R20XL	20"	117	H	8	284	8 1/2 J	810	1285	2833	340	50	BSW
275/60R20XL	20"	119	H	8.3	279	8J	838	1360	2998	340	50	BSW

A502 M+S



Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance. The optimized deployment of "Z" shape sipes, provide great grip on snow & ice conditions.

Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage.

Continuous outside tread blocks enhance excellent performance and precise control when cornering at highspeed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.

Special tread compound remain flexible at lower temperatures to make sure the grip on winter road conditions and reduce the rolling resistance.

Performance Test



SNOW&ICE




COMFORT



HIGH PERFORMANCE



SILENCE

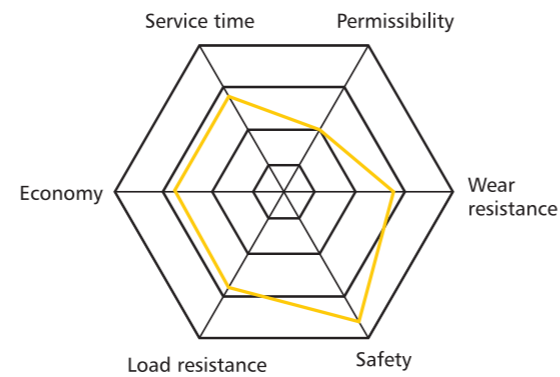

Size	Inch	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	MAX Load Kg	MAX Load LBS	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
165/70R13	13"	79	T	8	170	5.00B	562	437	963	300	44	BSW
185/60R14	14"	82	T	8.6	189	5 1/2J	578	475	1047	300	44	BSW
195/50R15	15"	82	H	8.6	201	6J	577	475	1047	300	44	BSW
195/55R15	15"	85	H	8.6	201	6J	595	515	1135	300	44	BSW
195/60R15	15"	88	H	8.6	201	6J	615	560	1235	300	44	BSW
195/65R15	15"	91	T	8.6	201	6J	635	615	1356	300	44	BSW
195/65R15	15"	91	H	8.6	201	6J	635	615	1356	300	44	BSW
195/65R15 XL	15"	95	T	8.6	201	6 J	635	690	1521	340	50	BSW
195/55R16 XL	16"	91	H	8.6	201	6J	620	615	1356	340	50	BSW
205/55R16	16"	91	H	8.6	214	6 1/2J	632	615	1356	300	44	BSW
205/55R16 XL	16"	94	H	8.6	214	6 1/2J	632	670	1477	340	50	BSW
215/55R16 XL	16"	97	H	8.6	226	7J	642	730	1609	340	50	BSW
225/55R16 XL	16"	99	H	8.6	233	7J	654	775	1709	340	50	BSW
205/50R17 XL	17"	93	V	8.5	214	6 1/2J	638	650	1433	340	50	BSW
215/55R17 XL	17"	98	V	8.5	226	7J	668	750	1653	340	50	BSW
225/45R17 XL	17"	94	V	8.6	225	7 1/2J	634	670	1477	340	50	BSW
225/50R17 XL	17"	98	V	8.5	233	7J	658	750	1653	340	50	BSW
225/55R17 XL	17"	101	V	8.5	223	7J	680	825	1819	340	50	BSW
235/45R17 XL	17"	97	H	8.6	236	8J	644	730	1609	340	50	BSW
235/55R17 XL	17"	103	H	8.5	245	7 1/2J	690	875	1929	340	50	BSW
225/40R18 XL	18"	92	V	8.5	230	8J	637	630	1389	340	50	BSW
225/45R18 XL	18"	95	H	8.5	225	7 1/2J	659	690	1521	340	50	BSW
235/55R18 XL	18"	104	H	8.5	245	7 1/2J	715	900	1984	340	50	BSW
235/60R18 XL	18"	107	H	8.5	240	7J	739	975	2149	340	50	BSW
245/40R18 XL	18"	97	V	8.0	248	8 1/2 J	653	730	1609	340	50	BSW
245/45R18 XL	18"	100	V	8.5	243	8J	677	800	1764	340	50	BSW
245/60R18	18"	105	H	8.5	248	7J	751	925	2039	300	44	BSW
255/55R18 XL	18"	109	V	8.5	265	8J	737	1030	2271	340	50	BSW
235/55R19 XL	19"	105	H	8.5	245	7 1/2J	741	925	2039	340	50	BSW
245/45R19 XL	19"	102	H	8.5	243	8J	703	850	1874	340	50	BSW
275/40R19 XL	19"	105	V	8.0	278	9 1/2J	703	925	2039	340	50	BSW
255/50R19	19"	107	H	8.5	265	8J	739	975	2149	340	50	BSW
255/55R19	19"	111	H	8.5	265	8J	763	1090	2403	340	50	BSW
275/40R20 XL	20"	106	H	8.5	278	9 1/2J	728	950	2094	340	50	BSW
275/45R20	20"	110	H	8.5	273	9J	756	1060	2337	340	50	BSW
315/35R20 XL	20"	110	V	8.2	333	11J	735	1060	2337	340	50	BSW
265/45R21 XL	21"	108		8.0	277	9 1/2J	781	900	1984	340	50	BSW

A869 M+S



Optimized groove
It is beneficial to improve the stability of driving on ice and improve driving safety.

Shoulder support
The Shoulder continuity pattern block can improve the strength of the tire shoulder, improve the support effect with the ground, and ensure driving safety.

Optimized structure profile
The optimized structure profile is matched with dense and robust pattern blocks to meet the better carrying capacity of the vehicle.

New steel sheet design:
The optimized steel sheet structure can meet the requirement of anti-skid performance and evenly disperse various stresses, so that the tread wear is more uniform and the wear resistance is improved.



Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	MAX Load		MAX Pressure		Sidewall Description
								Kg	LBS	Kpa	Psi	
165/70R14C	6PR	89/87	R	8.6	170	5J	588	580/545	1280/1200	375	55	BSW
175/65R14C	6PR	90/88	T	8.6	177	5J	584	600/550	1325/1235	375	55	BSW
175/70R14C	6PR	95/93	T	8.6	177	5J	602	690/650	1521/1435	375	55	BSW
175R14C	8PR	99/98	R	8.6	178	5J	634	775/750	1710/1655	450	65	BSW
185R14C	8PR	102/100	R	8.6	188	5 1/2J	650	850/800	1875/1765	450	65	BSW
195/70R15C	8PR	104/102	R	9	201	6J	655	900/850	1985/1875	450	65	BSW
215/65R15C	6PR	104/102	R	9	221	6 1/2J	661	900/850	1985/1875	375	55	BSW
205/70R15C	6PR	106/104	R	9	209	6J	669	950/900	2095/1985	450	65	BSW
215/70R15C	8PR	109/107	R	9	221	6 1/2J	683	1030/975	2270/2150	450	65	BSW
225/70R15C	8PR	112/110	R	9.3	228	6 1/2J	697	1120/1060	2470/2335	450	65	BSW
175/75R16C	8PR	101/99	R	8.6	177	5J	668	825/775	1820/1710	475	70	BSW
185/75R16C	8PR	104/102	R	9	184	5J	684	900/850	1985/1875	475	70	BSW
195/60R16C	6PR	99/97	T	9	201	6J	640	775/730	1710/1610	375	55	BSW
195/65R16C	8PR	104/102	R	9	201	6J	660	900/850	1985/1875	475	70	BSW
195/75R16C	8PR	107/105	R	9	196	5 1/2J	698	975/925	2150/2040	475	70	BSW
205/65R16C	8PR	107/105	R	9	209	6J	672	975/925	2150/2040	475	70	BSW
205/75R16C	8PR	110/108	R	9	203	5 1/2J	714	1060/1000	2335/2205	475	70	BSW
215/60R16C	6PR	103/101	R	9	221	6 1/2J	664	875/825	1930/1820	375	55	BSW
215/65R16C	8PR	109/107	R	9	221	6 1/2J	686	1030/975	2270/2150	475	70	BSW
215/75R16C	8PR	113/111	R	9.3	216	6J	728	1150/1090	2535/2405	475	70	BSW
225/65R16C	8PR	112/110	R	9.3	228	6 1/2J	698	1120/1060	2470/2335	475	70	BSW
225/75R16C	10PR	121/120	R	9.3	223	6J	744	1450/1400	3195/3085	575	85	BSW
235/65R16C	8PR	115/113	R	9.3	240	7J	712	1215/1150	2679/2535	475	70	BSW

Performance Test



DRAINAGE




STABILITY



WET



SNOW&ICE

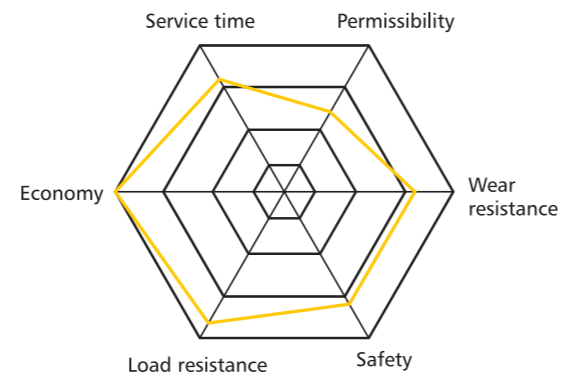

A506 M+S



Multi-directional groove distribution design:
It is beneficial to improve the stability of driving in the ice and the safety of driving.

Diamond Angle cutting design
Can effectively pierce through the water film, stabilize on ice and improve the anti-slip effect.

High-density 3D steel sheet design
While ensuring the softness of the grounding surface of the tire, it also increases the strength of the overall pattern block to ensure super grip and reduce the feeling of driving lag.

High-score white carbon black formula design
Improve tire grip in cold environments and ensure tire safety performance at low temperatures.

Performance Test



DRAINAGE



STABILITY



BRAKING



SNOW&ICE



Size	Inch	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	MAX Load Kg	MAX Load LBS	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
165/70R13	13"	79	S	8.5	170	5J	562	437	963	300	44	BSW
175/70R13	13"	82	S	8.3	177	5J	576	475	1047	300	44	BSW
175/65R14	14"	82	S	8.3	177	5J	584	475	1047	300	44	BSW
175/70R14	14"	84	S	8.5	177	5J	602	500	1102	300	44	BSW
185/60R14	14"	82	S	8.3	189	5 1/2J	578	475	1047	300	44	BSW
185/65R14	14"	86	S	8.3	189	5 1/2J	596	530	1168	300	44	BSW
185/70R14	14"	88	S	8.5	189	5 1/2J	616	560	1235	300	44	BSW
185/55R15	15"	82	S	8.3	194	6J	585	475	1047	300	44	BSW
185/60R15	15"	84	S	8.8	189	5 1/2J	603	500	1102	300	44	BSW
185/65R15	15"	88	S	8.3	189	5 1/2J	621	560	1235	300	44	BSW
195/50R15	15"	82	S	8.8	201	6J	577	475	1047	300	44	BSW
195/55R15	15"	85	S	8.8	201	6J	595	515	1135	300	44	BSW
195/60R15	15"	88	S	8.3	201	6J	615	560	1235	300	44	BSW
195/65R15	15"	91	S	8.8	201	6J	635	615	1356	300	44	BSW
205/60R15	15"	91	S	8.5	209	6J	627	615	1356	300	44	BSW
205/65R15	15"	94	S	8.5	209	6J	647	670	1477	300	44	BSW
205/70R15	15"	96	S	8.5	209	6J	669	710	1565	300	44	BSW
185/55R16	16"	83	S	8.8	194	6J	610	487	1074	300	44	BSW
195/55R16	16"	87	S	8.8	201	6J	620	545	1201	300	44	BSW
205/55R16	16"	91	S	8.3	214	6 1/2J	632	615	1356	300	44	BSW
225/55R16	16"	95	S	8.8	233	7J	654	690	1521	300	44	BSW
195/60R16	16"	89	S	8.8	201	6J	640	580	1279	300	44	BSW
205/60R16	16"	92	S	9.1	209	6J	652	630	1389	300	44	BSW
215/55R16	16"	93	S	8.8	226	7J	642	650	1433	300	44	BSW
215/60R16	16"	95	S	9.1	221	6 1/2J	664	690	1521	300	44	BSW
215/65R16	16"	98	S	8.5	221	6 1/2J	686	750	1653	300	44	BSW
215/70R16	16"	100	S	8.5	221	6 1/2J	708	800	1764	300	44	BSW
225/70R16 XL	16"	107	S	8.5	228	6 1/2J	722	975	2149	340	50	BSW
235/70R16	16"	106	S	8.5	240	7J	736	950	2094	300	44	BSW
215/45R17	17"	91	S	8.8	213	7J	626	545	1201	300	44	BSW
215/50R17	17"	95	S	8.8	226	7J	648	615	1356	300	44	BSW
215/60R17	17"	96	S	8.5	221	6 1/2J	690	710	1565	300	44	BSW
225/45R17	17"	94	S	8.8	225	7 1/2J	634	615	1356	300	44	BSW
225/50R17	17"	98	S	8.8	233	7J	658	670	1477	300	44	BSW
215/55R17	17"	94	S	8.8	226	7J	668	670	1477	300	44	BSW
225/55R17	17"	97	S	8.8	233	7J	680	730	1609	300	44	BSW
235/55R17	17"	99	S	8.8	245	7 1/2J	690	775	1709	300	44	BSW
225/60R17	17"	99	S	8.5	228	6 1/2J	702	775	1709	300	44	BSW
225/65R17	17"	102	S	8.5	228	6 1/2J	724	850	1874	300	44	BSW
235/65R17 XL	17"	108	S	8.5	240	7J	738	900	1984	340	50	BSW
245/45R17	17"	95	S	8.8	243	8J	652	690	1521	300	44	BSW
265/65R17	17"	112	S	9.5	272	8J	776	1120	2469	300	44	BSW
285/65R17	17"	116	S	9.5	292	8 1/2J	802	1250	2756	300	44	BSW
185/75R16C	C	104/102R	R	10	184	5J	684	1800	3968	475	70	BSW
195/75R16C	C	107/105Q	Q	10	196	5 1/2J	698	1950	4299	475	70	BSW

A503 M+S



Ideal for conditions in the region which does not require extreme snow tyres and more performance is required.

This unique tread design also features a proven modular tread block geometry which offer a level of grip and performance which is unique in its class.

A Directional tyre that offers fantastic water dispersion and exceptional grip thanks to its unique features which includes an excessive number of sipes allowing the tread to conform to the road surface, and its extra wide channels that excavates fluids in preposition to the pressure and weight of the vehicle and road requirements.



Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	MAX Load Kg	MAX Load LBS	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
175/65R14 XL		86	T	8.8	177	5J	584	530	1168	340	50	BSW
185/65R14 XL	-	90	T	8.8	189	5 1/2J	596	600	1323	340	50	BSW
185/60R15 XL	-	88	T	8.8	189	5 1/2J	603	560	1235	340	50	BSW
185/65R15 XL	-	92	T	8.8	189	5 1/2J	621	630	1389	340	50	BSW
195/60R15 XL	-	92	T	8.8	201	6J	615	630	1389	340	50	BSW
195/65R15 XL	-	95	T	8.8	201	6J	635	690	1521	340	50	BSW
205/55R16 XL	-	94	T	8.8	214	6 1/2J	632	670	1477	340	50	BSW
205/60R16 XL	-	96	T	8.7	209	6 J	652	710	1565	340	50	BSW
215/60R16 XL	-	99	T	8.8	221	6 1/2J	664	775	1709	340	50	BSW
215/65R16 XL	-	102	T	8.8	221	6 1/2J	686	850	1874	340	50	BSW
215/70R16	-	100	T	8.8	221	6 1/2J	708	800	1764	300	44	BSW
225/60R16 XL	-	102	T	8.8	228	6 1/2J	676	850	1874	340	50	BSW
235/70R16	-	106	T	8.7	240	7J	736	950	2094	300	44	BSW
215/55R17 XL	-	98	H	8.7	226	7J	668	750	1653	340	50	BSW
215/60R17 XL	-	100	H	8.7	221	6 1/2J	690	800	1764	340	50	BSW
225/45R17 XL	-	94	H	8.8	225	7 1/2J	634	670	1477	340	50	BSW
225/50R17 XL	-	98	H	8.7	233	7J	658	750	1653	340	50	BSW
225/55R17 XL	-	101	H	8.7	233	7J	680	825	1819	340	50	BSW
225/60R17 XL	-	103	H	8.7	228	6 1/2J	702	875	1929	340	50	BSW
225/65R17 XL	-	106	T	8.7	228	6 1/2J	724	950	2094	340	50	BSW
185/75R16C	8PR	104/102	R	8.8	184	5J	684	900/850	1985/1875	475	69	BSW
235/65R16C	8PR	115/113	R	9.7	240	7J	712	1215/1150	2680/2535	475	69	BSW
LT245/75R16	10PR	120/116	S	10.2	248	7J	774	1380/1260	3042/2778	550	80	BSW

Performance Test



STABILITY



SNOW&ICE



BRAKING



DRAINAGE

